

OPALXL


Cartridge Filter

For crystal clear, sparkling water



Rugged Construction

Constructed from high impact polypropylene and designed for easy maintenance. The Opal XL cartridge filters will provide years of trouble free service.

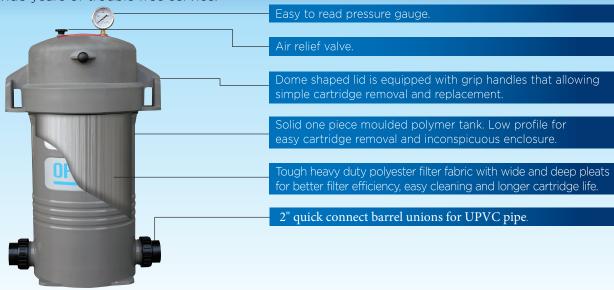

Operating Temperature: 39F to 122F


Maximum Pressure Drop: 50 PSI

Waterco Opal XL Cartridge Filters

| PART NUMBER | PRODUCT DESCRIPTION | ELEMENT SIZE | INLET & OUTLET | |
|-----------------|--|--------------|----------------|--|
| 217270NA | OPAL XL C270 SQFT | 270 SQ.FT | 2" | |
| 701041 + 701038 | OPAL XL CARTRIDGE 270 (REPLACEMENT CARTRIDGE POWERED BY PLEATCO) | 270 SQ.FT | 2" | |

Specifications

| MODEL | FILTER AREA SQ.FT. | VERTICAL CLEARANCE | FILTER DIAMETER | FLOW RATE GPM ² RESIDENTIAL | TURNOVER CAPACITY GALLONS | | |
|-------------|--------------------------|-----------------------|--------------------|--|---------------------------|----------|----------|
| | | | | | 8 HOURS | 10 HOURS | 12 HOURS |
| OPAL XL 270 | 270 | 54" | 10.2" | 134 | 48,000 | 60,000 | 72,000 |



OFFICES - North America Waterco (USA) Inc Augusta, Georgia, USA Tel: +1 706 793 7291 Waterco Canada

Waterco Canada Longueuil, Quebec, Canada Tel: +1 450 748 1421

FFICES - OVERSEAS

NSW - Sydney (Head Office Tel: +61 2 9898 8600

Waterco (Europe) Limited Sittingbourne, Kent. UK Tel: +44 (0) 1795 521 733

Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570

Waterco (C) Limited Guangzhou, China Tel: +86 20 3222 2180 Waterco (Far East) Sdn Bho Selangor, Malaysia Tel: +60 3 6145 6000

Jakarta, Indonesia Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd Nehsons Building, Singapore Tel: +65 6344 2378 DISTRIBUTED BY:





