

#### **Dimensions**

## MultiCyclone 12 Ultra

## MultiCyclone 16 Ultra



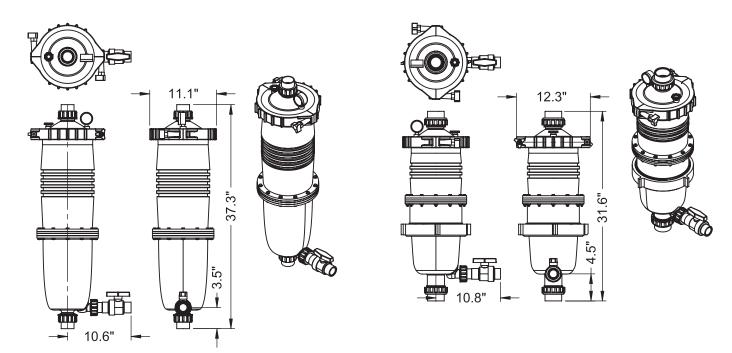

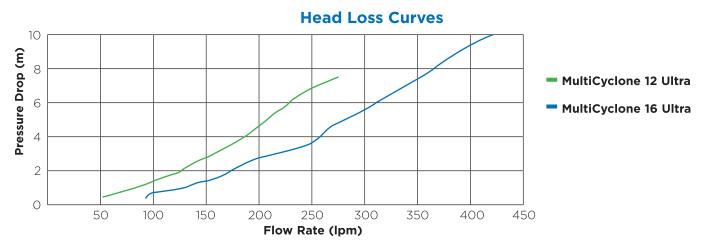

MultiCyclone Ultra is covered by a 2 year warranty. Commercial installations are covered by a 1 year warranty.

/aterco Singapore Intl Pte

DISTRIBUTED BY:








SAVE TIME, WATER AND ENERGY



#### **Dual stage filtration**

Incoming water tangentially enters its multiple hydrocyclones, generating a strong centrifugal effect. Approximately 80% of the incoming dirt load is spiralled down to its clear sediment chamber. The outgoing water is finally polished via its inbuilt cartridge filter, producing crystal clear water.

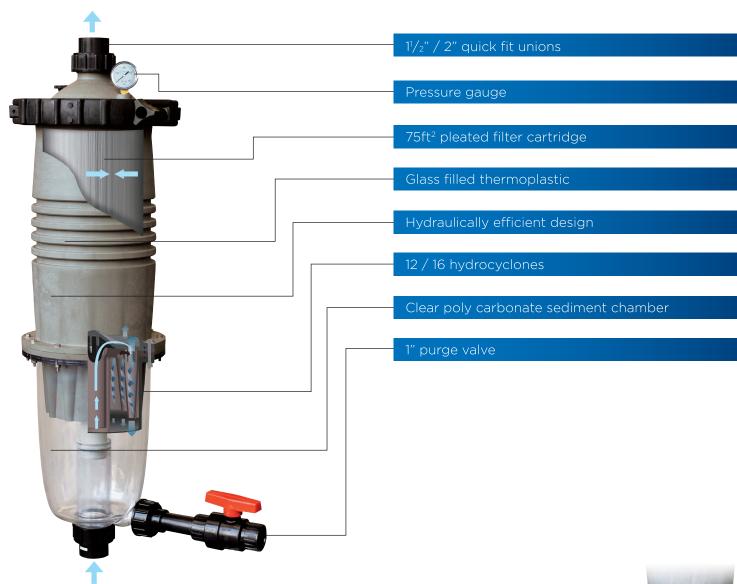

# **Extended filter capacity**

As MultiCyclone Ultra's centrifugal section filter pre-filters up to 80% of the incoming dirt load, the capacity of its 75ft<sup>2</sup> filter cartridge is magnified by up to 5 times.

#### **Ease of maintenance**

MultiCyclone Ultra's sediment chamber is easily cleaned by opening its purge valve. Only 4 gallons of water is discharged.

Saving nearly 2,000 gallons a year.

### **Ultra compact**

MultiCyclone Ultra's streamline design combines the benefits of the Waterco award winning MultiCyclone and a compact cartridge filter that enables a reduction in pool equipment foot print and required pipe work, reducing the filtration system overall head loss. The MultiCyclone Ultra can also be mounted using the MultiCyclone support stand.



Note: It is recommended when installing the MultiCyclone Ultra directly to the pump as illustrated, the MultiCyclone Ultra should be supported to ensure stability.

## **MultiCyclone Support Stands**

MultiCyclone Ultra's streamline design combines the benefits of the Waterco award winning MultiCyclone to suit all MultiCyclone models and most installations.




MultiCyclone Stand MKII part # 200372

MultiCyclone Pump Stand part # 2003730

MultiCyclone Stand MKII, a great option if the height of the installation is prohibitive.

## **Dimension**



Note: MultiCyclone Support Stand is suitable for most Waterco Domestic Pool Pumps. Excluding Hydrostar & all Commercial

# Specifications

Part number	Model	Hydrocyclones	Connection Ports	Minimum Flow	Maximum Flow	Filter Area	Maximum Pool Size	Maximum Pressure
200378	MultiCyclone12 Ultra	12	1 1/2"	11gpm	60gpm	75ft²	108,0001	50psi
200379	MultiCyclone16 Ultra	16	2"	13gpm	74gpm	75ft²	134,0001	50psi

Maximum flow is limited by the surface area of the filter cartridge. Residential Cartridge Design Filtration Rate: 41 lpm/m<sup>2</sup> (1gpm/ft<sup>2</sup>)

